




CJX1-9
(3TB40)



CJX1-32
(3TB44)

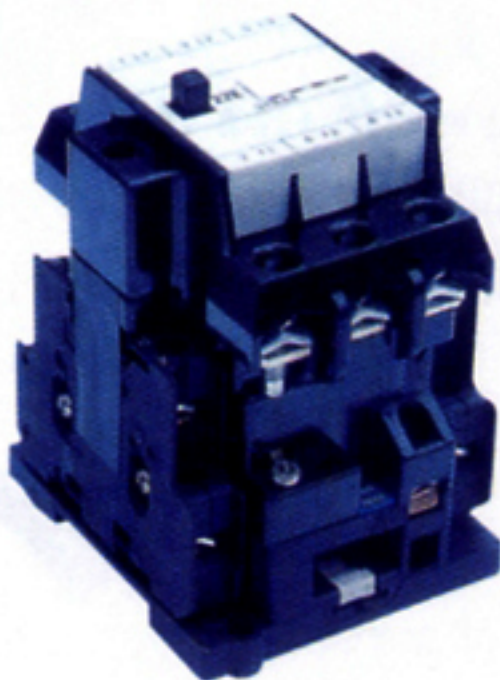

CJX1-80
(3TH80)



CJX1-82
(3TH82)

CJX1(3TB) Ac Contactor

Application

The contactor is suitable for using in elec. circuits up to the rated voltage 660V AC 50Hz or 60Hz, rated current 630A, for making and breaking, and for frequent starting and controlling the motor. After combined with the mechanical interlocking device, it becomes 3TD Series convertible contactor for Controlling, starting, breaking and Reversing of the motor. The products comply with IEC947-2 & VDE0660.

Specifications

Type	Rated thermal current(A)	Rated operating current at 380V(A)	Rated operating current at 660V(A)	The power of controlled motor(KW)		Type auxiliary contact
				380(V)	660(V)	
CJX1-9(3TB40)	22	9	7.2	4	5.5	
CJX1-12(3TB41)	22	12	9.5	5.5	7.5	NO NC
CJX1-16(3TB42)	35	16	13.5	7.5	11	1NO+1NC 2NO+2NC
CJX1-22(3TB43)	35	22	13.5	11	11	
CJX1-32(3TB44)	55	32	18	15	15	2NO+2NC

CJX1(3TH) Auxiliary Contactor

Application

The auxiliary contactor is suited by controlled circuit with voltage of AC 50/60Hz, 660V and DC 660V. They control all kinds of magnetic coil and amplify or transfer signal to relative controlled element simultaneously.

Specifications

Type	Type of contact		Type	Rated operational current (A)		Controllable motor power AC3(KW)
	NO	NC		le=AC11, AC14	DC11	
CJX1-80(3TH80)	40-0A	4	110V	-	0.9	-
	31-0A	3	220V	10	0.45	2.2
	22-0A	2				
	13-0A	1				
CJX1-82(3TH82)	04-0A	-	380V	6	-	4
	80-0A	8	440V	-	0.25	4
	71-0A	7				
	62-0A	6				
	53-0A	5	660V	2	-	4
44-0A	4					